




Toucan Eco Active Plus Assembled Install Guide

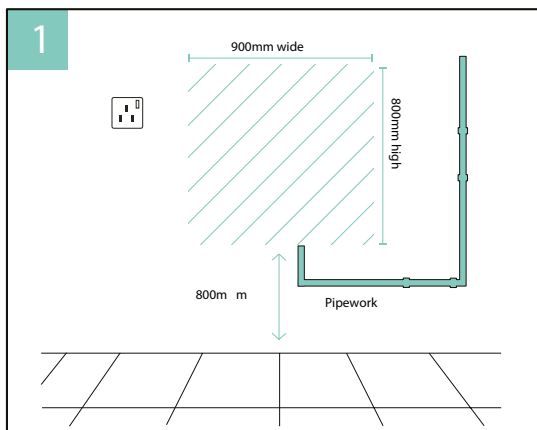

Choose a wall space 900mm wide, 800mm high and 800mm above the floor, close to an electric wall socket and cold water pipe. If necessary, install a cold water pipe (15mm) as shown above. You will need 2 to 5 bar of water pressure to enable the dispensing system to function correctly.

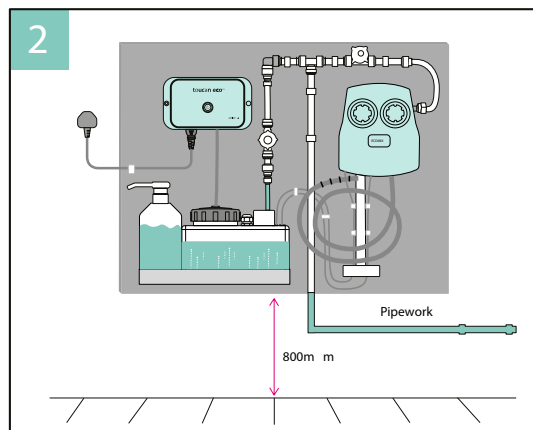


Fix the board to the wall 800mm above the floor, to support at least 15kg. Connect your cold water pipe to the pipework at the bottom of the board. This will feed water to the 5L tank and dispensers. Plug in and switch on the activation unit. The button light will be green.

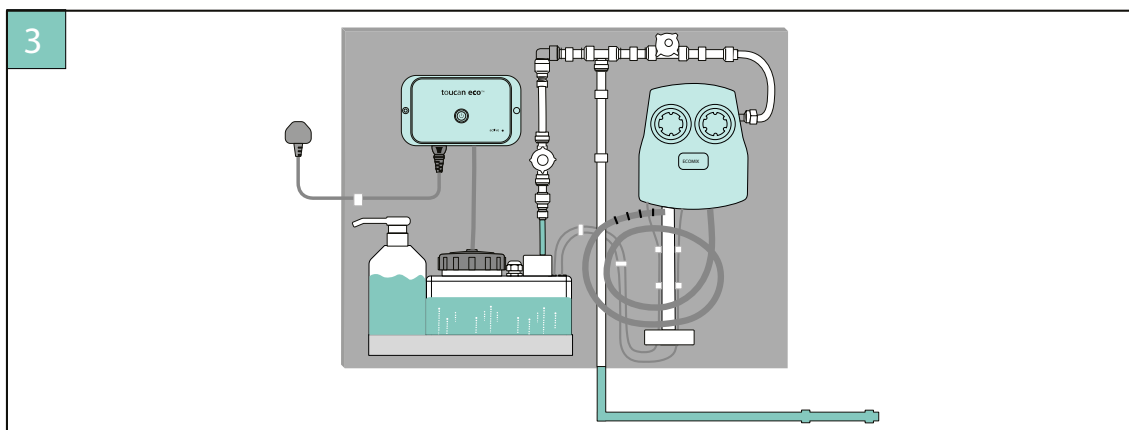


The brine container will contain salt granules lining the bottom. Fill the container with cold water to produce a super saturated brine solution. Alternatively, we recommend the use of soluble salt sachets (ordered separately).


Components




5L holding tank and control box




2.5L brine container and dispenser



Control box power lead




Stainless steel shelf




2x 15mm to 10mm reducer




10mm blue feeder pipe




4x shelf screws and wall plugs



2x control box screw and wall plugs



Dual mixing dispenser



Flexible hose